


oks00TR5-rubber-01/02: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions: 32.3075, 32.3235; 02 positions: 32.32, 32.3245.


oks00TR5-rubber-03/04: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions: 54.935,54.941; 02 positions: 54.9375,54.943.

oks00TR5-rubber-05/06: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions:15.932,15.939 ; 02 positions: 15.939,15.944.


oks00TR5-rubber-07/08: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions:29.691,29.696 ; 02 positions: 29.695,29.6985.

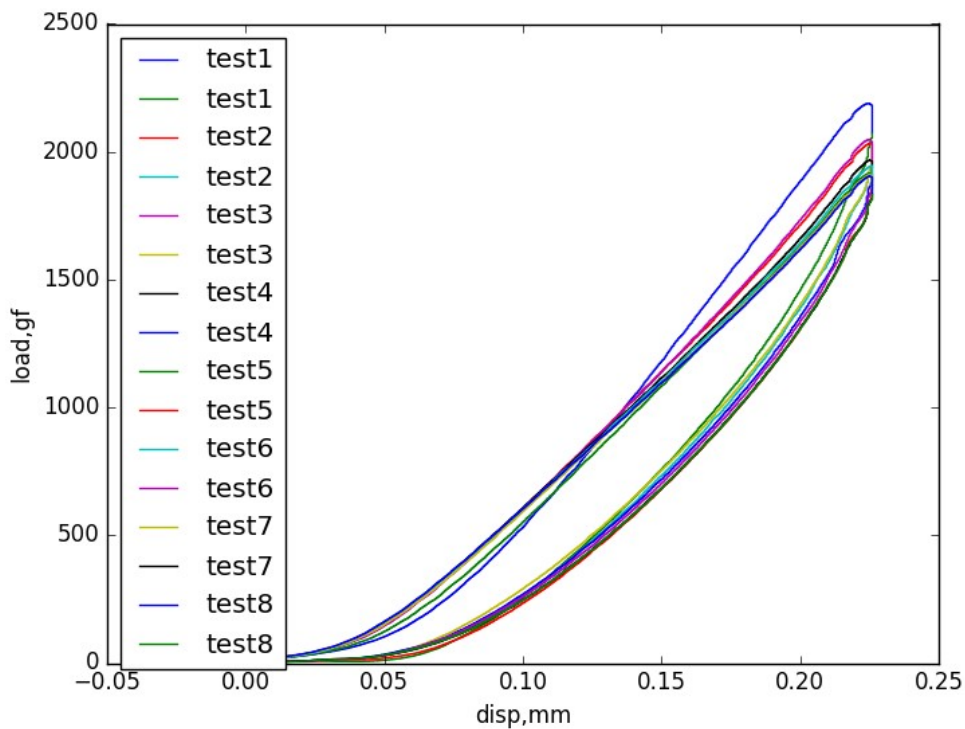

Repeatability of ramp load -unload before preconditioning

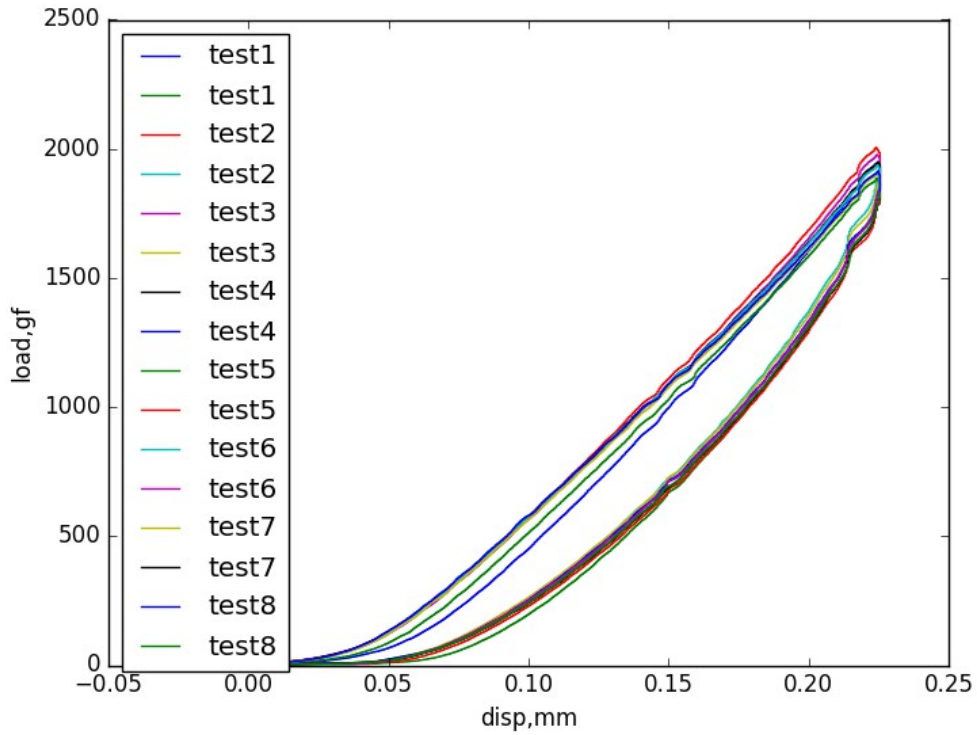

Repeatability of ramp load-unload after preconditioning

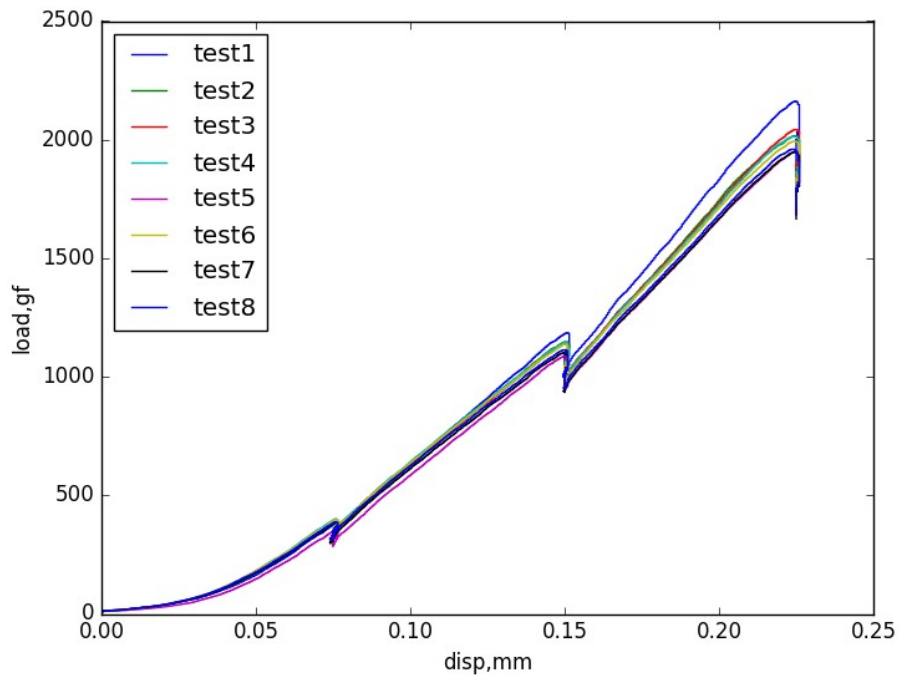

Stress-relaxation repeatability