


oks00TR5-**rubber**-01/02: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions: 32.3075, 32.3235; 02 positions: 32.32, 32.3245.

oks00TR5-**rubber**-03/04: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions: 54.935,54.941; 02 positions: 54.9375,54.943.



oks00TR5-**rubber1**-01/02: rubber unconfined compression test. thickness:1.5 mm. preconditioning with ramp before and after. 01 positions: 30.1015,30.1095 ; 02 positions:30.109,30.114.

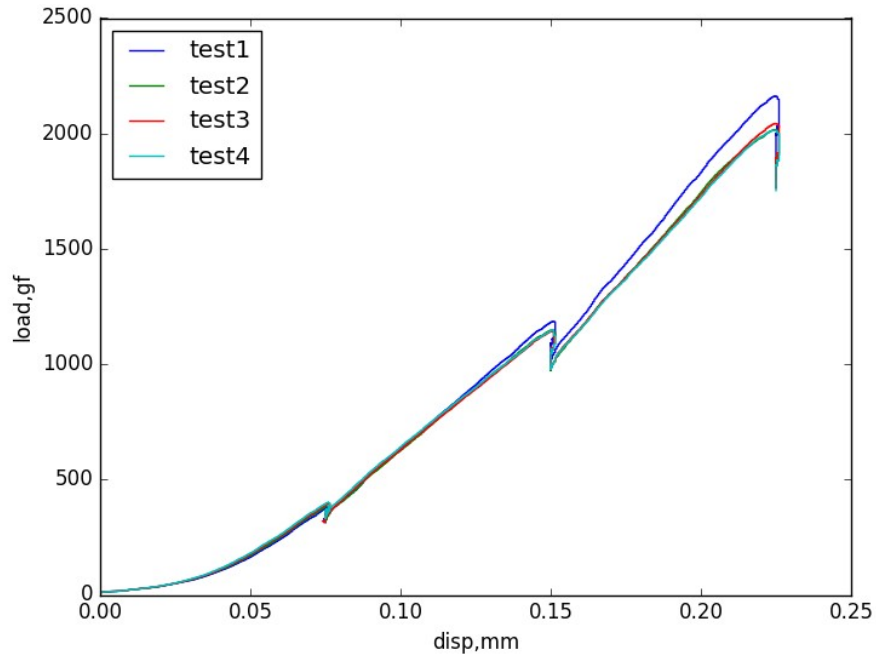